

Floodlight - F04T500

Model Number: VL F04BN500_BC-03

Features:

- ▶ High power efficiency
- ▶ Wide range of optics
- ▶ Wide range of installation equipments
- ▶ Protection Level IP68
- ▶ Long lifespan, cost-saving

Applications:

- ▶ Outdoor areas, Storage areas, Harbours
- ▶ Warehouses, Industrial lighting
- ▶ Sport Centers, Sport Fields
- ▶ Harbour and railway cranes
- ▶ Architectonic lighting, Billboards



IP
68

122
lm/W

≥70
Ra

Optical Information

Color Temperature	6000K
Lumen Output	60000lm
Optics	15°, 25°, 45°, 60°, 90°
CRI	≥70
Lifespan (L70)	50,000h

Environmental Factors

Operating Temperature	-40 ~ +50°C
Protection Level	IP68
Warranty	3 years

Mechanical Information

Dimensions (W x H x D)	251mm x 494mm x 123mm
Weight	11.3kg
Material	Aluminum

Electrical Information

Input Voltage	100-240V AC (50/60Hz)
Power Consumption	485W
Dimmability	No


Power	Product Numbers	Electrical Numbers (in Finland)	Optics	CCT	lux @ 1m	Lumen (lm)
485W	VL F04BN500BC-03	4526730	15°	6000K		60000
	VL F04BN500BC-03	4526731	25°			
	VL F04BN500BC-03	4526732	45°			
	VL F04BN500BC-03	4526733	60°			
	VL F04BN500BC-03	4526734	90°			

Floodlight - F04T500


Model Number: VL F04BN500_BC-03, electrical numbers on page 1

Dimensions

in mm

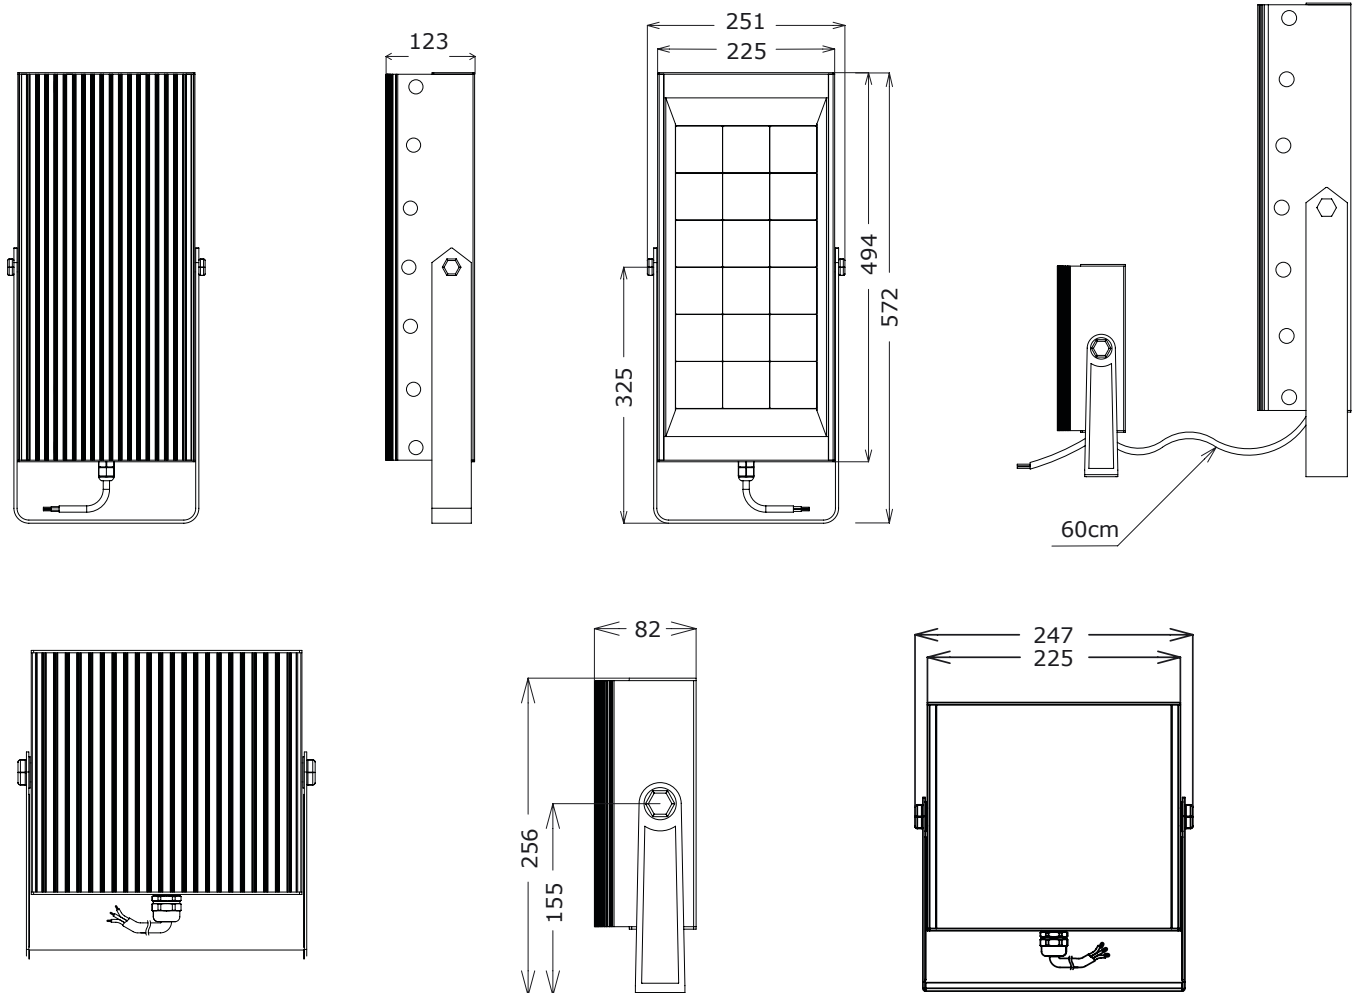

Accessories: wall-mounting bracket



Mounting handle, stainless steel

In addition to standard model mounting handle also available in stainless steel for demanding applications.

NB: Also available:

Optics: 130°, 135°, 120°x50° and 135°x50°

Color Temperatures: 3000K and 4000K

To your knowledge:

1. Color consistency : 5-step MacAdam
2. OSRAM Square Led chip
3. Product delivery includes a separate power adapter

IP68 DESIGNLIGHTS
CONSORTIUM
pole mounting application

